

COMBi-CLL

LOG LOADER

LOAD LOGS INTO A CONTAINER IN 6 MINUTES.

The Logs are pre-loaded into the robust, 40' long high-sided Tub. The patented push-pull mechanism powers the loaded Tub into the container. Once inside, the Hatch is closed to hold the logs securely in place, and the Tub is retracted.



COMBiLiFT
LiFTING INNOVATION



THE COST EFFECTIVE SOLUTION FOR LOADING LOGS INTO CONTAINERS



REAR RACK

Ensure the logs do not extend beyond the tub



STURDY HATCH DOOR

Pilot -Operated Check Valves on the Cylinders ensure the Hatch Door is positively locked





HEAVY DUTY TUB

With reinforced Base & Side Walls give structural rigidity and eliminate risk of container wall damage

COMBi-CLL

LOG LOADER

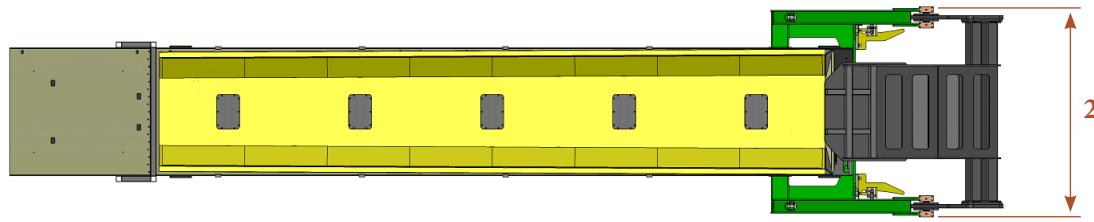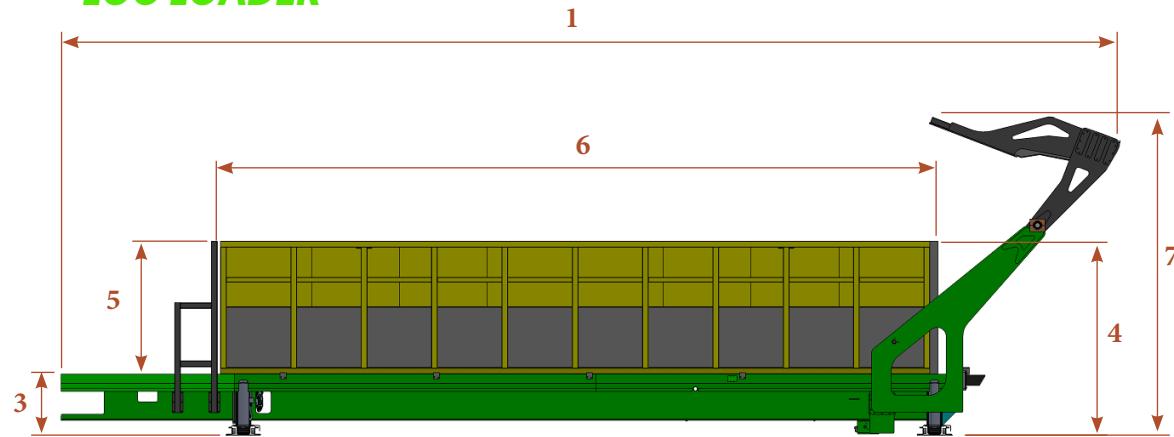

DESCRIPTION		COMBi-CLL SLIP-SHEET (IMPERIAL)
1	OVERALL LENGTH	680 "
2	WIDTH	143 "
3	SHEET HEIGHT	40 - 60 "
4	HEIGHT FROM GROUND TO TOP OF TUB	125-145 "
5	TUB HEIGHT	84 "
6	TUB LENGTH	456 "
7	OVERAL HEIGHT	205 - 225 "
A	CAPACITY	65,000 LBS
B	MOTOR	50 HP
C	POWER	480 V, 3-PHASE, 100 AMP
D	HYDRAULIC STROKE MECHANISM	479 "
E	CONTAINER SIZES: FITS STANDARD & HIGH CUBE	20'/30'/40'
F	SLIP SHEET MATERIAL	HARDOX



Logs are preloaded into the Tub & Container attached

Loaded Tub is lowered into the Container

Loaded Tub securely inside Container.

Hatch Closes Down

Hatch Locks Down & Tub Powers Out

Hatch Opens Up & loaded Container is Detached.