


COMBI-AGT




Powered By
 **Lithium-ion**

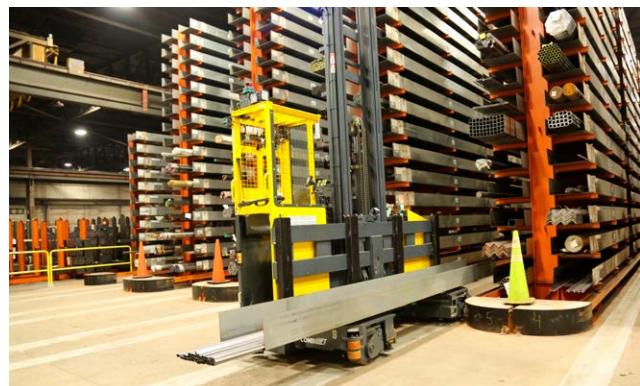

The first autonomously guided side-loader with optional manual override operation. Safely and reliably deliver long loads in narrow aisles around the clock with the new Combi-AGT. Perfect for operation in cantilever racking.

Combi-AGT

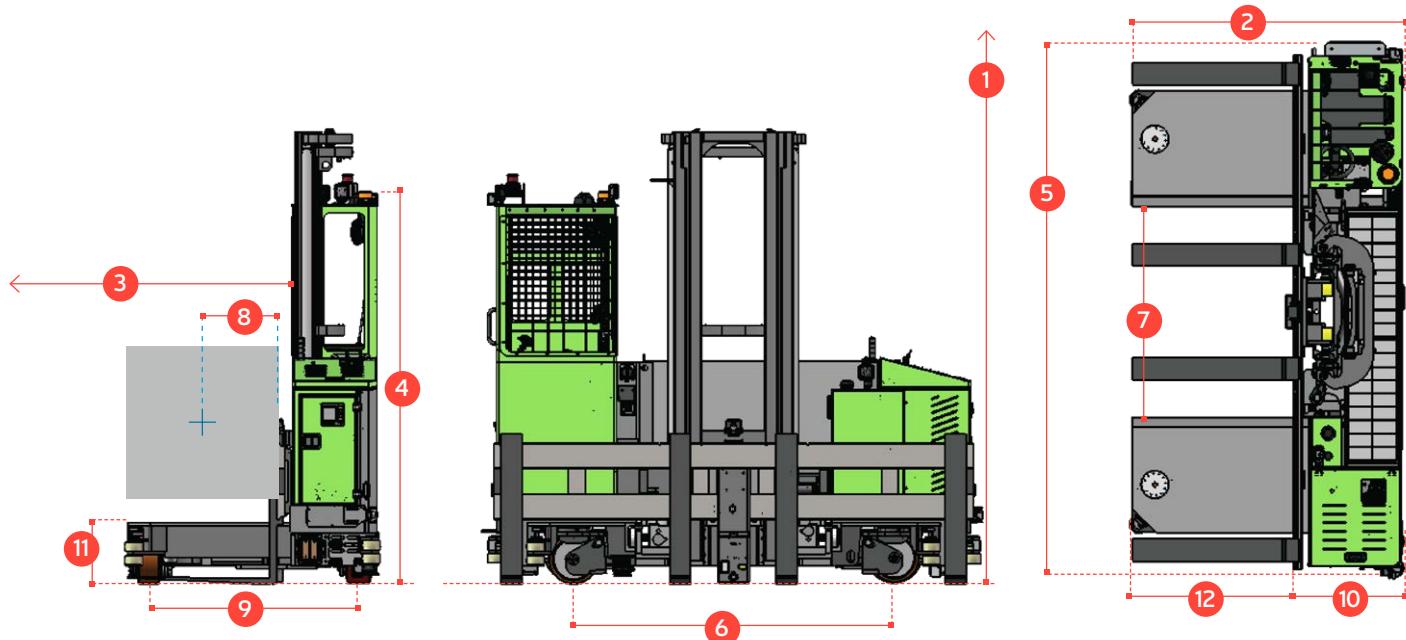

Ref	Description	C5.000 AGT		
1	Max. Lift Height		8382 mm	
2	Overall Width	1372 mm	1981 mm	2286 mm
3	Mast travel	1473 mm	2083 mm	2388 mm
4	Height Over Cab (without work lights)		2692 mm	
5	Overall Length		3620 mm	
6	Wheelbase		2299 mm	
7	Frame Opening		1397 mm	
8	Load Center Distance	305 mm	610 mm	610 mm
9	Track	1080 mm	1689 mm	1994 mm
10	Length from Face of Fork		762 mm	
11	Platform Height (with front lowered)		406 mm	
12	Platform Length	610 mm	1220 mm	1524 mm
A	Capacity		5000 kg	
B	Unladen Weight		10432 kg	
C	Unladen weight (without battery)		9107 kg	
D	Battery Capacity		72V 560V Lithium Ion	
E	Max load length		7315 mm	
F	Max speed		7 kph	

International Application No EP2024/075099; United Kingdom Application No GB2313769.8

Distributed by:

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

Requirements:

- Integration with facility WMS
- Guided aisles
- Uniform Stillages
- WiFi in operating area
- Indoor use only

Features Include:

- Automated Charging
- 4 Wheel Steering
- 2 Wheel Drive
- Tilting Chassis +/- ½" at front
- Load Scanning (patent pending)
- AGT fleet control

Optional:

- Barcode scanning