

# COMBi-GT 3,000

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.


# COMBiLiFT

*LIFTING INNOVATION*



# COMBi-GT

## 3,000

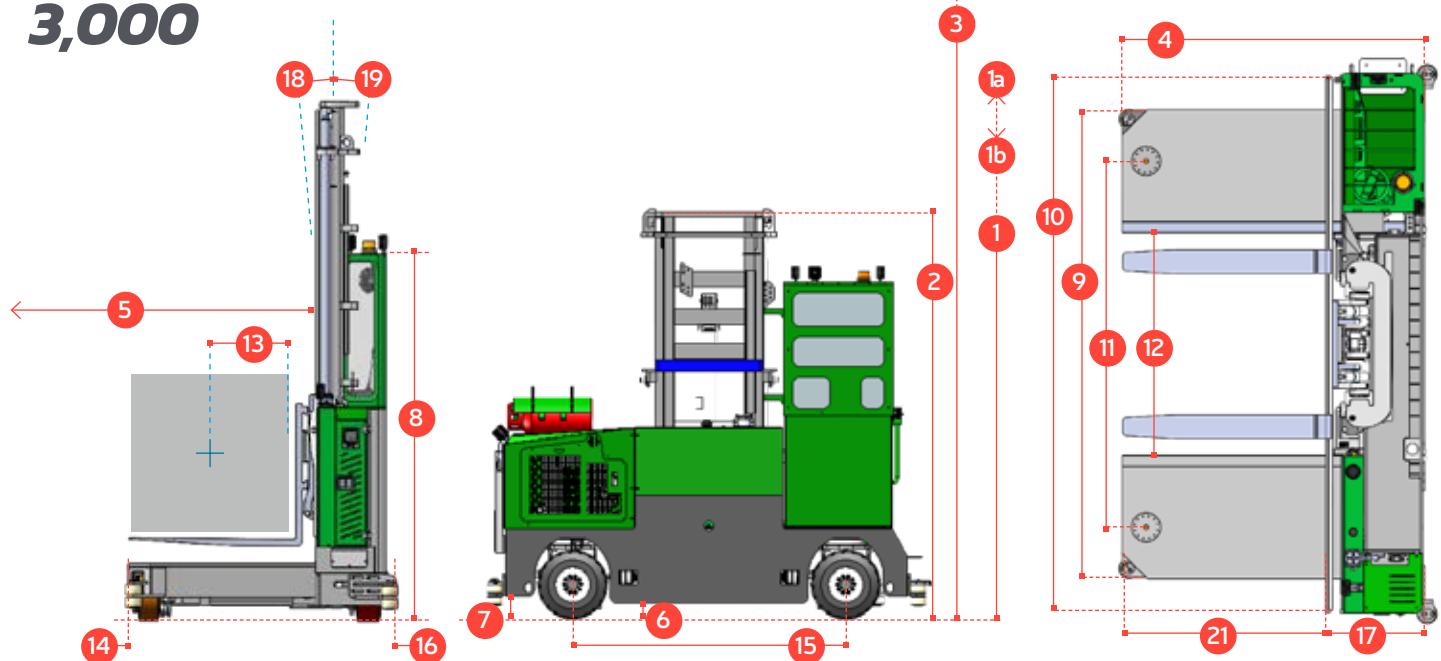

REF.	DESCRIPTION	C3,000 GT (mm)						
1a	Lift Height							6300
1b	Free Lift Height							2642
2	Height Mast Closed							3988
3	Max. Mast Raised							7696
4	Overall Length	1270	1422"	1575	1727	1880	2032	2185
5	Mast travel	660	812	965	1117	1270	1422	1575
6	Ground Clearance Under Mast							27
7	Ground Clearance to Center of Wheelbase							27
8	Height Over Cab (without work lights)							2895
9	Width Across Platforms							2946
10	Outside Spread of Fork Arms							3327
11	Wheelbase							2286
12	Frame Opening							1397
13	Load Center Distance	304	381	457	33	609	609	609
14	Overhang Front							52
15	Track	965	1117	1270	1422	1575	1728	1880
16	Overhang Back							52
17	Length from Face of Fork							660
18	Forward Tilt							3°
19	Backward Tilt							4½°
20	Platform Height (with front lowered)							406.4
21	Platform Length	610	762	915	1066	1220	370	1524
A	Capacity							3,000 kg
B	Unladen Weight	8165kg	8391kg	8618kg	8845kg	9071kg	9298kg	9525kg
C	Maximum Ground Speed							7½ mph
D	Gradeability							10%
E	3 ltr GM LPG							65 HP
F	Electrics							12 Volt
G	Fork Section 50 x 150 x	15494	19355	23241	27076	30988	9398	38710
H	350 / 150 - 280 Front Tire (Solid) x2							OD 355mm / Width 152"
I	400 x 178 - 300 Rear Tire (Super Elastic) x2							OD 584 / Width 254

Distributed by:

### Features Include:

- Rubber Mounted Overhead Guard
- 2 Wheel Hydrostatic Drive
- 4 Wheel Steering
- Load Sensing Steering
- Tilting Chassis +/- 12 mm at front
- Hydraulic Oil Cooler

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.