

COMBi-LR *Live Receiving Model*


COMBiLiFT

LIFTING INNOVATION

The Combi-LR is based on the highly successful and reliable C-series multidirectional forklifts. The offset driving position provides the ideal view of the cage while a very small turning radius makes for excellent manoeuvrability.



COMBi-LR

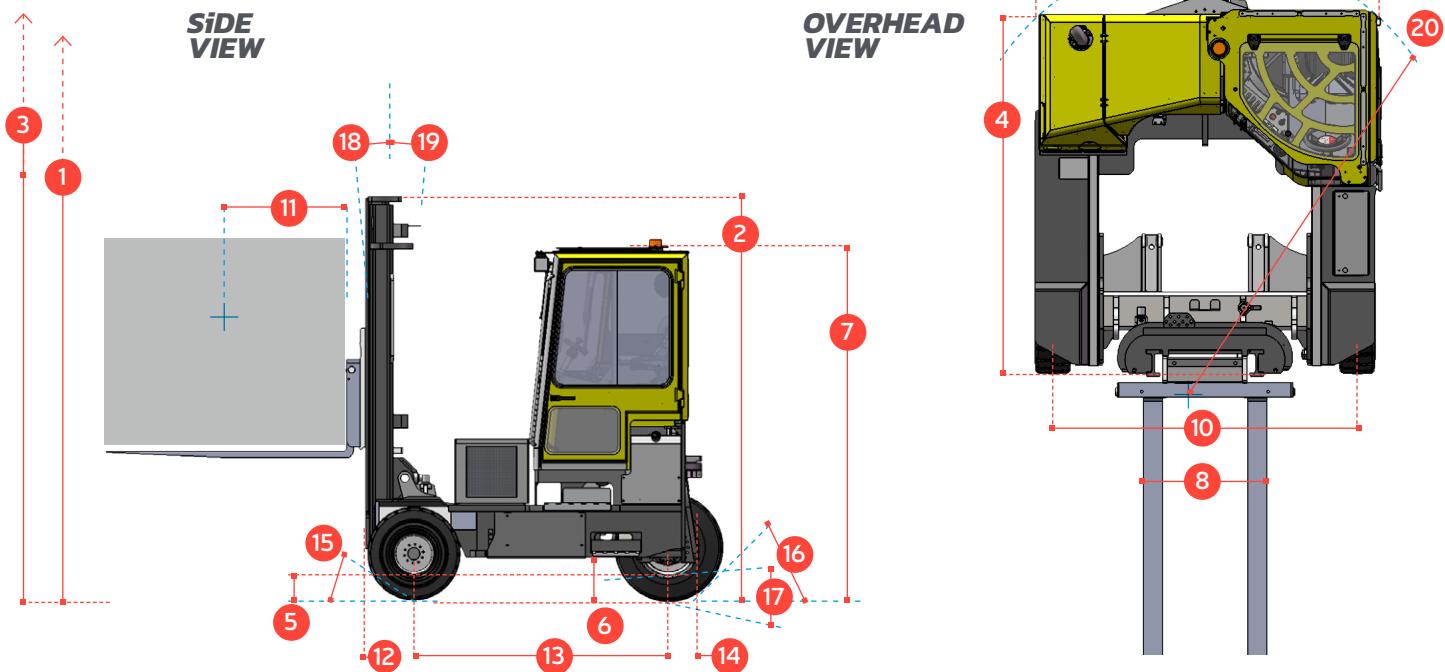

REF.	DESCRIPTION	
1a	Standard Lift Height	159"
1b	Free Lift Height	0
2	Height Mast Closed	117"
3	Max. (Mast Raised)	98"
4	Overall Length	99"
5	Mast Travel	54"
6	Ground Clearance Under Mast	10"
7	Ground Clearance to Wheelbase Centre	12"
8	Height Over Cab or of Overhead Guard	100"
9	Width	88"
10	Outside Spread of Fork Arms	53"
11	Track Front	78 3/4"
12	Frame Opening	55"
13	Load Centre Distance	23 1/2"
14	Overhang Front	12"
15	Wheel Base	81
16	Overhang Back	5
17	Length from Face of Fork	51"
18	Approach Angle	45°
19	Ramp Angle	29°
20	Departure Angle	45°
21	Forward Tilt	3°
22	Backward Tilt	5°
23	Minimum Outside Radius	96"
24	Platform Height	27"
25	Platform Length	47"

A	Capacity	10,000 lbs
B	Unladen Weight	15741 lbs
C	Maximum Ground Speed	15 km/h
D	Gradeability	15%
E	Deutz 2.9 litre Diesel	74 HP
F	Electrics	12 Volt
G	Fork Sections 50mm x 150mm	47"
H	23 x 10 - 12 Front Tyre	OD22" / Width 10"
I	355/65- 15 Rear Tyre	OD 32" / Width 11"
J	Standard Colour	Green and Grey
K	Suspension Seat	KAB Model 116

Features Include:

- Hydraulic Oil Cooler
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- +/- 100mm Side Shift
- +/- 3° Rotating Carriage
- Front Rubber Mounted Cabin
- Rear Hydraulic Mounted Cabin

Benefits Include:

- Small Turning Radius
- Operates Indoor and Outdoors
- Reduced Maintenance Costs
- No Mechanical Brakes
- Minimised Tyre Spin
- Visibility
- Offset Driving Position Gives Excellent View of Poultry Cage

Distributed by:

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.